

Laying manual

On our website at www.naturinform.com you can find additional laying videos.

CREATIVE can be laid easily in two simple steps:




Step 1: Laying the first strip

Start with putting up the starting bracket. It is important to keep at least 10 to 15 cm distance to the ground (water collection!) and to align the strip properly according to the plummet.



Step 2: Laying the following strips

Now the mounting brackets are put onto the first strip and fixed to the underlying surface. The second strip is in turn laid onto this. Thereby you can mount the façade layer by layer up to the top. Keep checking whether the strips are still aligned according to the plummet!

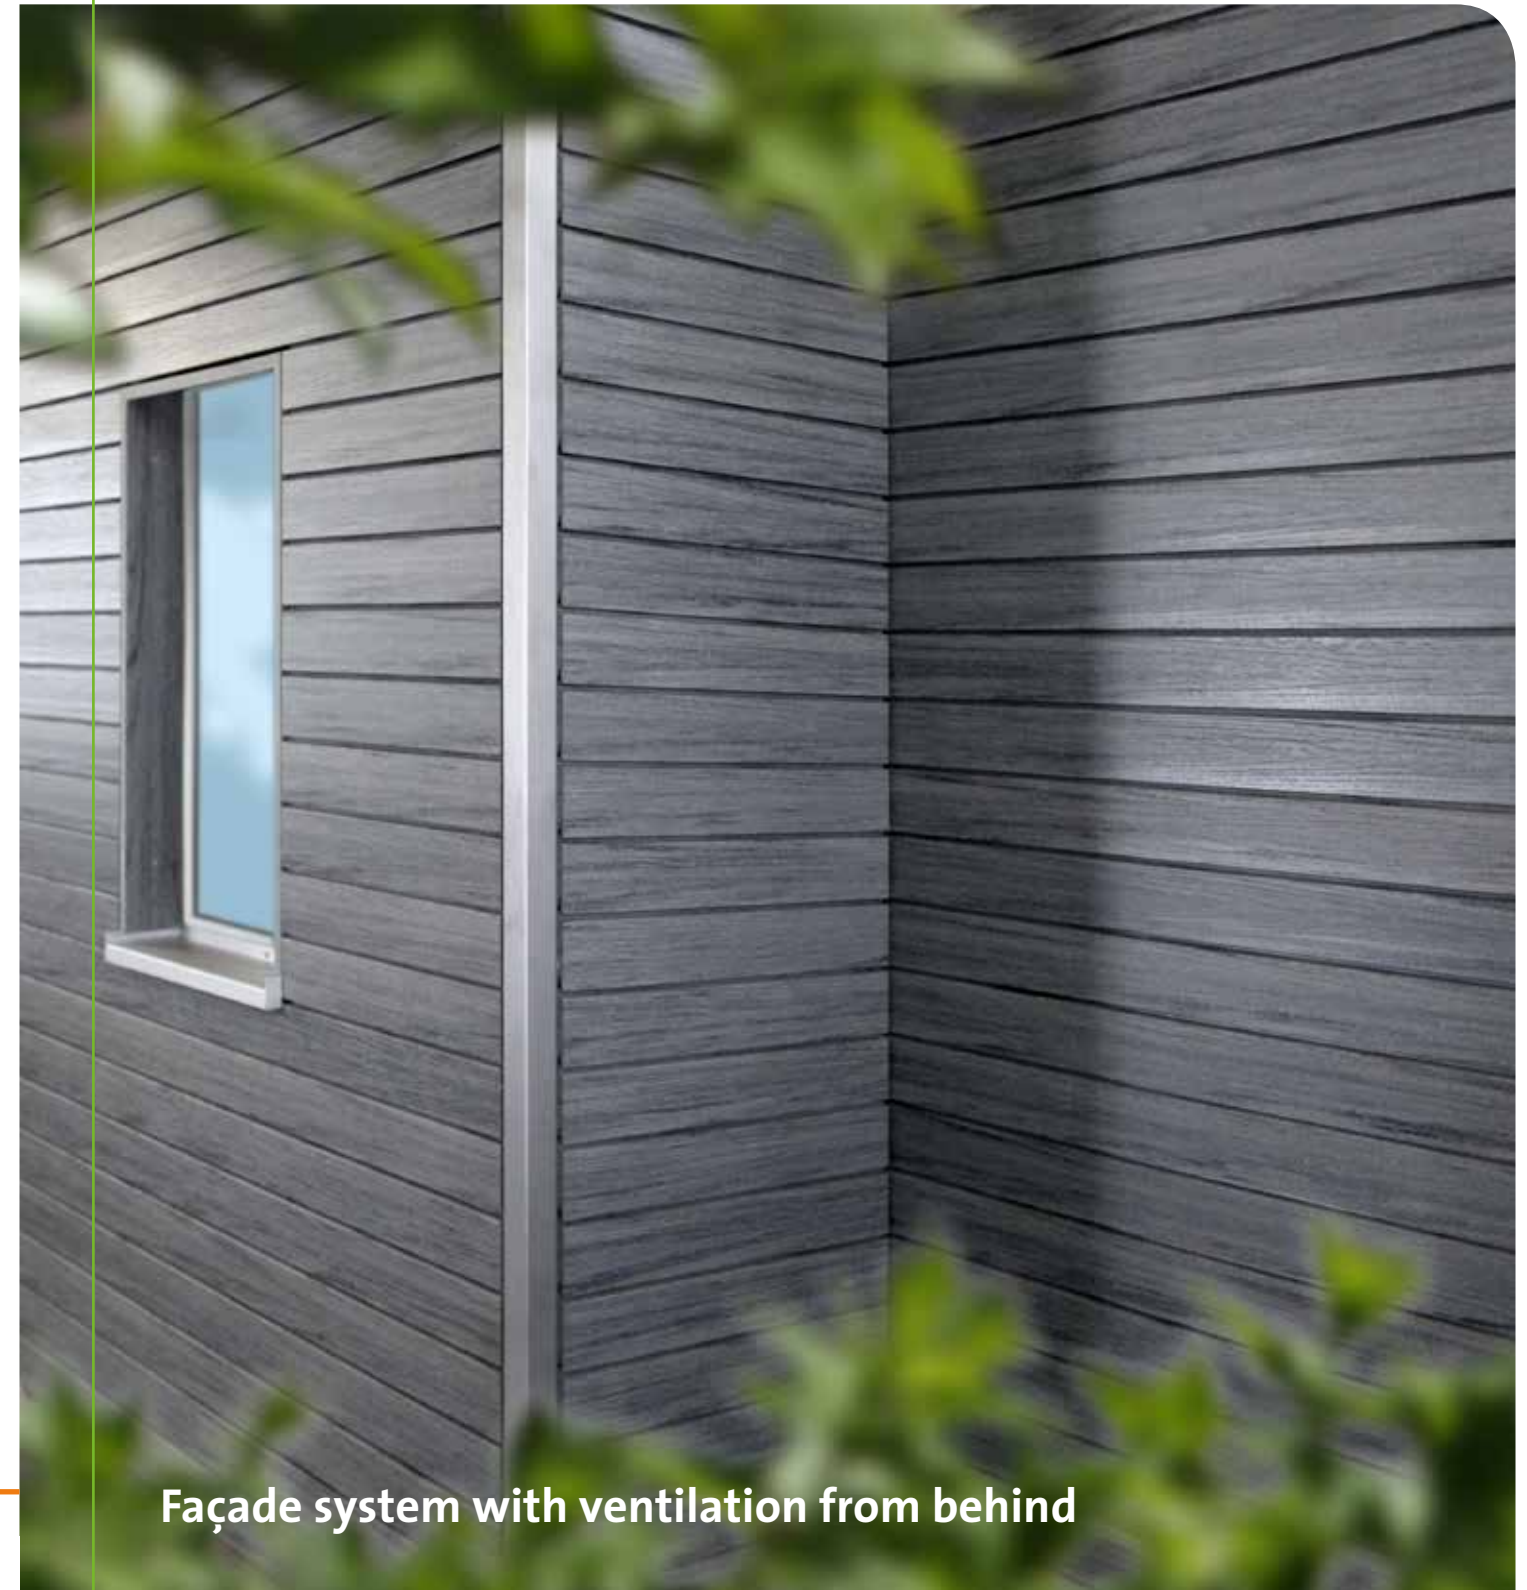

Façade system with ventilation from behind



MADE in GERMANY

This document was carefully compiled for you and is constantly being developed further. You can find the current and valid version at www.naturinform.com. Colours may vary. State: February, 2015



CREATIVE

...elegant façade system with a natural wooden look


Are you looking for a façade system that is durable, weatherproof and easy to look after? Would you like your façade to look both natural and stylish? Then our new product CREATIVE is just the thing for you.

Our massive rhombus strips made of our quality wood composite are now being used with our façade systems for new and already existing buildings. The strips which are available in a size of 99 mm and a standard length of 4 or 6 metres can be laid both horizontally and vertically. They are available in the exclusive colours oak, amber, chestnut brown and graphite grey, as well as in all our special colours on request. CREATIVE is not only optically appealing thanks to its patented, individual wooden grain with a natural looking surface. It is also resistant to weathering and UV radiation and extremely low on maintenance and easy to look after. In combination with suitable insulation, the rhombus strips can be used as a ventilated cladding façade system.

Your advantages when using CREATIVE:

- Resistance against weathering and UV radiation
- Shape and colour stability
- No need for renovation
- Hidden mounting thanks to NATURinFORM's laying brackets
- Simple assembly
- Reduced installation times

Format	visible height approx. 90 mm, total height approx. 103.3 mm thickness approx. 18 mm
Measure	99 mm
Gap between fixtures	max. 60 cm
Surface	brushed with wooden grain
Standard lengths	4 metres / 6 metres
Special lengths	at extra cost
Requirements	1 square metre of surface consists of approx. 10 running metres
Weight	approx. 1.9 kg per metre

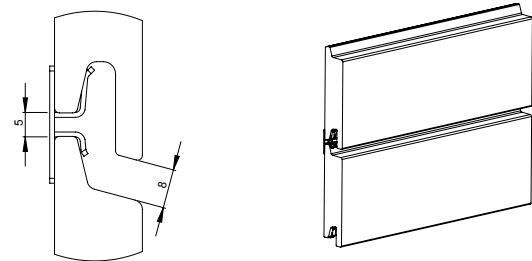

Surfaces for the façade cladding:




Oak brown Amber brown Chestnut brown Graphite grey

Special colours available on request



Natural Brown Black brown Anthracite Titan grey Grey
Cream white Lemon yellow Sun yellow Brick red Moss green Forest green Sea blue

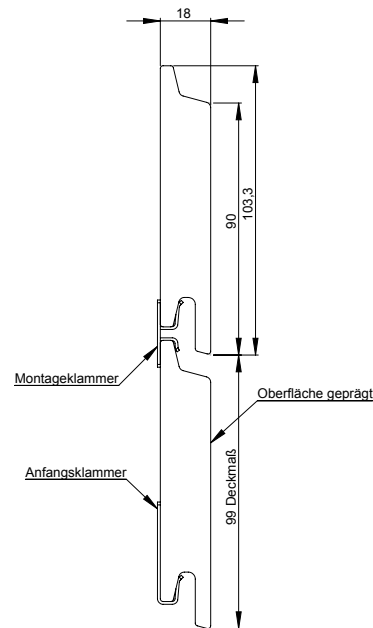


Corners and connection options

There are two ways to create corners:


Façade corners with mitre cuts:

The strips are cut at an angle, strictly according to measure.


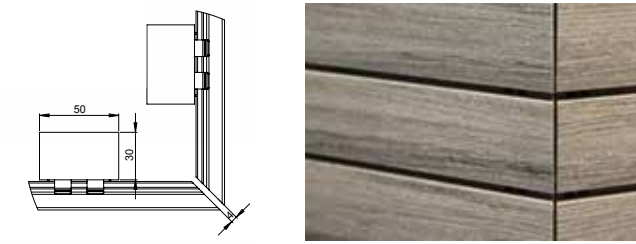


Façade corners of stainless steel:

Using our easy-to-mount stainless steel corners you can achieve an optically clean and elegant transition to the strips. This solution means that you can save material, too (approx. 5 cm per strip), as well as have a robust corner option.

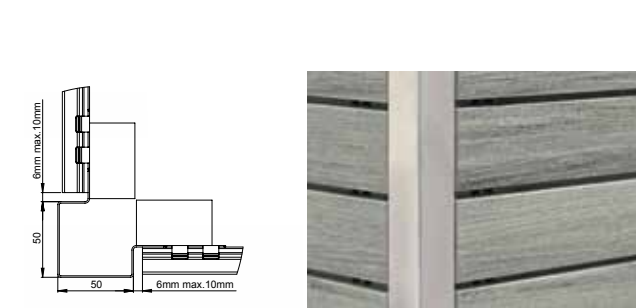

Other connection options:

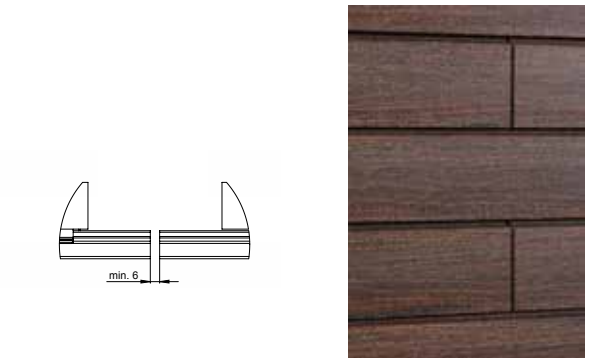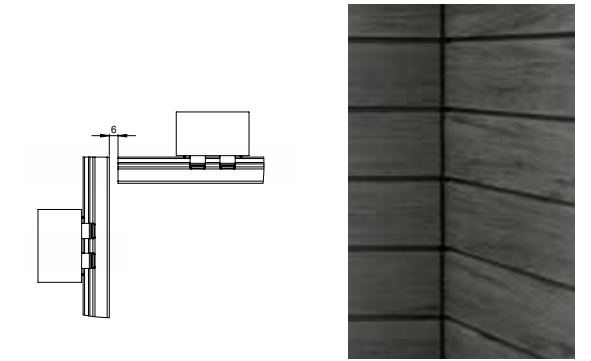

General information:

- Always lay our façade strips from bottom to top.
- The last strip must be visibly screwed on from outside.
- Please note the strip-measure of 99 mm.
- CREATIVE looks especially good if you plan in a full deck above the windows before mounting and then calculate 'downwards' from that point on.

Bracket requirements (Calculation formula):

18 brackets per 1 square metre
2-3 starting brackets per running metre

Strip requirements (Calculation formula):

10 strips per 1 metre (Height)
at a measure of 99 mm